



CT8007

Instructions

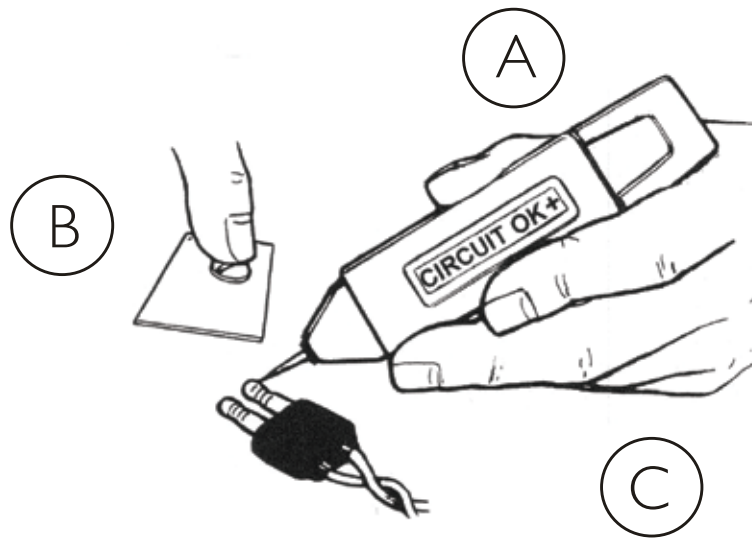

CAUTION

Use only in DC powered circuits with voltages between 6 and 28 Volt. DO NOT use on AC powered circuits or wall sockets.

- A- Hold tester by plastic body and place free hand on bare (grounded) metal part of the vehicle.
- B- Place tester point into connector or wire (pierce insulation if necessary).
- C- Tester will show "CIRCUIT OK+" when a positive voltage is detected or "CIRCUIT OK --" with a negative voltage.

www.OLCT.co



Order Online
www.olct.co

Email Order
info@olct.co

Phone Order
0466 909 653

Fax Order
07 3041 3232