

# GTC CT8015 DIGITAL MULTIMETER

With its auto-range and high sensitivity, the CT8015 digital multimeter, features a state of the art ergonomic design and styling for easier handling for day to day use. Full control with manual range selection, and a large 3.5 digit LCD display.

#### Display:

- ✓ 3½ Digit LCD (Max reading 1999)
- ✓ 1/2"(12.5 mm) Digits
- ✓ High Voltage warning indicator
- ✓ Automatic( - ) Negative polarity indicator
- ✓ Auto Zero
- ✓ Automatic Over Range Indication
- ✓ Low battery indicator

#### Power source:


- ✓ 9 Volt battery included

#### Test probes:

- ✓ 1000V/10A rated (IEC1010/EN61010 CAT II),900 mm long

#### Electrical Specifications:

- ✓ DC Voltage:  $\pm 0.8\% \pm 1$  dgts., 1M $\Omega$  input impedance, 600 V ac/dc Overload protection
- ✓ AC Voltage:  $\pm 1.5\% \pm 10$  dgts., 450K $\Omega$  input impedance, 40 to 200 Hz, 600 V ac/dc Overload protection
- ✓ Resistance:  $\pm 1.0\% \pm 3$  dgts., 250 V ac/dc Overload protection
- ✓ DC Current:  $\pm 1.0\% \pm 2$  dgts., Internal 200mA/10A 250V fuse protection
- ✓ Diode test: 1.4  $\pm$  0.6 mA test current, 3.2 V max. test voltage
- ✓ Continuity Test: Audible indicator (Buzzer) with circuit resistance is below 100  $\Omega$
- ✓ Transistor Test: hFE value from 0 to 1000 of npn and pnp transistors
- ✓ Warranty: 1 Year

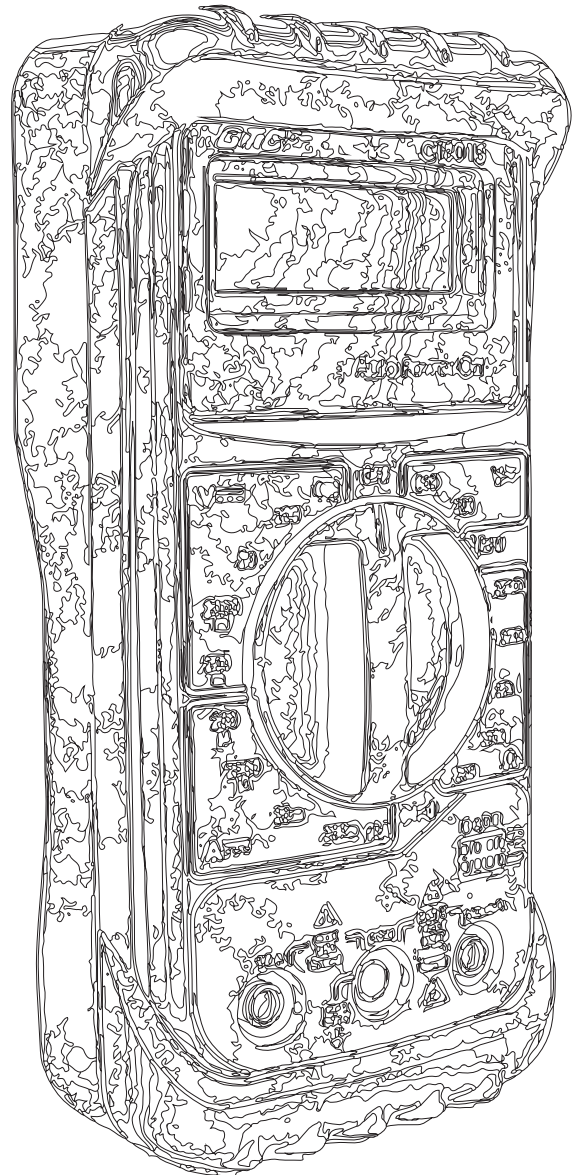

#### Kit Includes

- ✓ CT8015 Multimeter
- ✓ Soft Carry Pouch
- ✓ 2 x 0.9 m Test probes
- ✓ 1 x 9v alkaline battery
- ✓ Operation Manual

[www.OLCT.co](http://www.OLCT.co)



Order Online

[www.olct.co](http://www.olct.co)

Email Order

[info@olct.co](mailto:info@olct.co)

Phone Order

0466 909 653

Fax Order

07 3041 3232