

# Automatic BATTERY CHARGEUR with microprocessor

**GYS**

Ref. **024496**

## BATIUM 7-12

The **Batium** range controlled by **microprocessor** guarantees you the maximum effectiveness and **security**.



**15 ▶ 130 Ah**  
GEL/AGM/VRLA/LIQUIDE




The charge is **automatic/without supervision**.



50% shorter charge time compared to a traditional charger. Batium ensures an ultra-quick and safe charge, by providing a **constant average current** during "boost" phase.



Batium ensures a **100% charge** of all lead-acid batteries\* (IwUoU curve). A standard "automatic" charger, W2 or WU curve, charges up to 90% only.

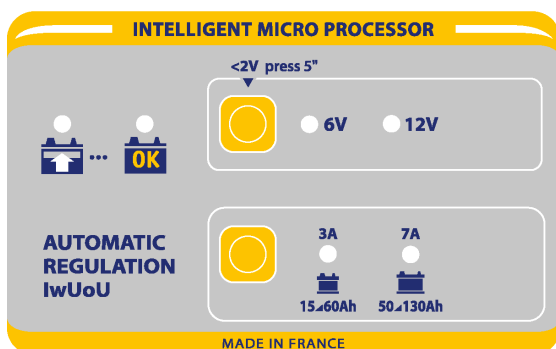


Batium is a microprocessor controlled **smart charger**, that constantly analyses the state of the battery and regulates the charge according to the battery's needs.



**Deeply discharged batteries** that are still in a good state of health (eg : Lights on when the vehicle is stopped) could have a voltage as low as 1V. Batium can **charge from 1 volt**, whereas most chargers cannot.



**Protection of the on-board electronics.** No need to disconnect the battery from the vehicle. No risk of sparks or short-circuits, and no current is supplied to the clamps unless they are connected to the battery terminals.

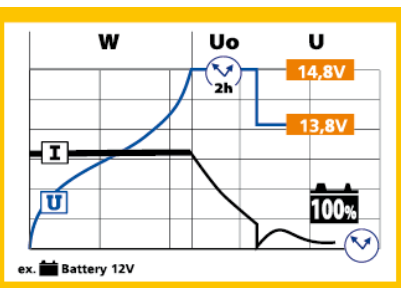

50/60 Hz V	W	V	CHARGE				FUSE UU	cm	Kg
			Reg	EFFICACE/RMS A	MOYEN (EN 60335) Reg1	Reg 2			
230	105	6-12	2	11A	3	7	15A	28x20x12	4,2



MADE in FRANCE

EN 60335-2-29

INVEST IN THE FUTURE

Email : [contact@gys.fr](mailto:contact@gys.fr)

[www.gys.fr](http://www.gys.fr)